




COMMON-RAIL INJECTOR BRUSH AND BRUSH PRODUCT FOR CLEANING AND POLISHING DIESEL COMPONENTS




The cleaning and polishing brush (*P.n. SICR*) fits a grinding wheel. The center hole can be enlarged to fit your equipment. Before using the brush must be immersed in diesel fuel for one hour, followed by squeezing excess fuel.

Each time that it is used, it must be impregnated with the brush product. *P.n. PSICR* (see photo N.1)

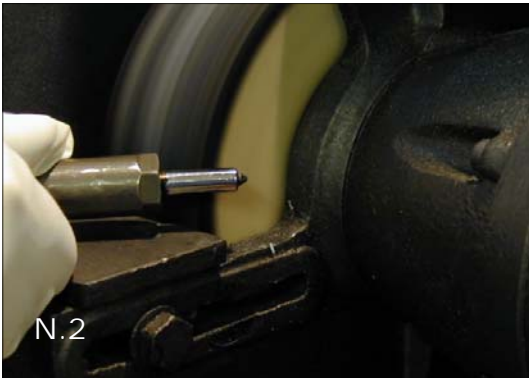

It is possible to clean and polish new nozzle types (also the Common-Rail) without damaging the nozzle holes.

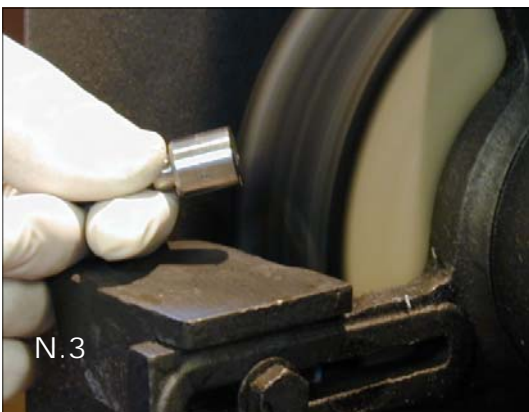

The brush is indispensable for polishing top surface of the nozzle and the injector body preventing leakage. This method of polishing also not not damage the surface, which happens with the old method of hand polishing (see photo 3-4)

